



## Shackle Fitting

Fits onto Tapered Head to provide a larger pulling loop for attaching the rope or pull line.

Rod Dia., in (mm)	3/16 (5)	1/4 (6)	5/16 (8)	7/16 (11)	9/16 (13)
<b>USC Thread</b>	<b>#12-24</b>	<b>5/16-18</b>	<b>3/8-16</b>	<b>3/8-16</b>	<b>3/4-10</b>
Shackle Fitting	-	-	08031101	08031101	08031100
<b>Metric Thread</b>	<b>M5</b>	<b>M8</b>	<b>M12</b>	<b>M12</b>	<b>M12</b>
Shackle Fitting	-	-	08031101	08031101	08031101



Female/Female



Male/Female

## Swivel Coupling

Used to connect two duct rods pushed into the conduit from the same end. Used when one length of duct rod is not long enough for the full conduit run. Also used as a rotating swivel when pulling wire or rope with the Tapered Head or Mini-Harness.

Rod Dia., in (mm)	3/16 (5)	1/4 (6)	5/16 (8)	7/16 (11)	9/16 (13)
<b>USC Thread</b>	<b>#12-24</b>	<b>5/16-18</b>	<b>3/8-16</b>	<b>3/8-16</b>	<b>3/4-10</b>
Female/Female	08033470	08033459	-	-	-
Male/Female	08033422	08033442	08036800	08036800	08036700
<b>Metric Thread</b>	<b>M5</b>	<b>M8</b>	<b>M12</b>	<b>M12</b>	<b>M12</b>
Female/Female	08033429	08033483	-	-	-
Male/Female	08033426	08033485	08036806	08036806	08036806



## Sonde Adapter

Couples a locating sonde or other device with an M10 male thread to the male end fitting of the duct rod. Specify sonde, thread and rodder.

Rod Dia., in (mm)	3/16 (5)	1/4 (6)	5/16 (8)	7/16 (11)	9/16 (13)
<b>USC Thread</b>	<b>#12-24</b>	<b>5/16-18</b>	<b>3/8-16</b>	<b>3/8-16</b>	<b>3/4-10</b>
Sonde Adapter	-	08036500	08036503	08036503	08036504
<b>Metric Thread</b>	<b>M5</b>	<b>M8</b>	<b>M12</b>	<b>M12</b>	<b>M12</b>
Sonde Adapter	-	08036505	08036501	08036501	08036501

Custom adapters available upon request.



## Repair Kit

Replacement repair kit that comes standard with duct rod. Accessories available in a convenient bag that attaches to the cage.

Rod Dia., in (mm)	3/16 (5)	1/4 (6)	5/16 (8)	7/16 (11)	9/16 (13)
Replacement Kit	08035770	08035772	08035774	08035776	08035778

## Duct Rodder Replacement Brake Handles

Use Condux Duct Rodder Replacement Brake Handles to replace missing or damaged handles on existing cages.

Part No.	Description
02218300	16" (406 mm) Duct Rodder Replacement Brake Handle
08081547	24" (610 mm) Duct Rodder Replacement Brake Handle
08081547	30" (762 mm) Duct Rodder Replacement Brake Handle
08081567	45" (1,143 mm) Duct Rodder Replacement Brake Handle



FISHING & RODDING

## Duct Rodder Replacement Cages

Use Condux Duct Rodder Replacement Cages to update older cages or to replace damaged cages. Fits all major manufacturers' fiberglass rods.


Rod Dia., in (mm)	3/16 (5)	1/4 (6)	5/16 (8)	7/16 (11)	9/16 (13)
Replacement Cage	08081516R	08081524R	08081530R	08081550R	08081550R
Cage Diameter	16" (406)	24" (610)	30" (762)	45" (1,143)	45" (1,143)



## Duct Rod Pusher

The Condux Rod Pusher, which has been designed for the purpose of installing duct rod into conduit. The conduit must previously have been installed underground or overhead to receive the duct rod and must be of sufficient length on exit to be received by the machine. The duct rod is continuously pushed into the conduit by a roller drive powered by a cordless, corded or pneumatic drill. Screw adapter into conduit and clamp pusher to the adapter.

Part Number	Description
08081301	Duct Rod Pusher

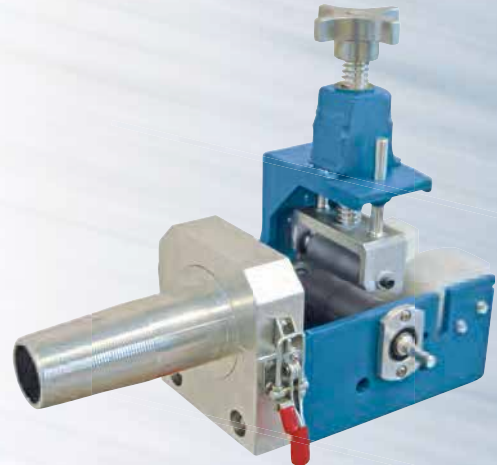

Split Threaded Adapter Part No.	Duct Size (in)	Duct I.D. Range
08201108	.75	0.83 - 1.00
08201110	1	0.90 - 1.13
08201112	1.25	1.25 - 1.40
08201115	1.5	1.40 - 1.65
08201020	2	1.91 - 2.10
08201025	2.5	2.29 - 2.47
08201030	3	2.83 - 3.10
08201041	4	3.80 - 4.06
08201051	5	4.71 - 5.08
08201061	6	5.61 - 6.10



CONDEX

FISHING & RODDING

Female End Fitting



Male End Fitting

**FYI**  
Don't forget to order the Epoxy.

## Replacement/Repair Accessories

### Threaded End Fittings

Use as a replacement to the factory installed end fittings if the end fitting breaks off or if the duct rod breaks close to the end of the rod. Installation instructions are included with the end fittings. Epoxy is required for installation and is ordered separately.

Rod Dia., in (mm)	3/16 (5)	1/4 (6)	5/16 (8)	7/16 (11)	9/16 (13)
<b>USC Thread</b>	<b>#12-24</b>	<b>5/16-18</b>	<b>3/8-16</b>	<b>3/8-16</b>	<b>3/4-10</b>
Male	08033420K	08033440K	08036307K	08036303K	08036005K
Female	-	-	08036306K	08036304K	08036006K
<b>Metric Thread</b>	<b>M5</b>	<b>M8</b>	<b>M12</b>	<b>M12</b>	<b>M12</b>
Male	08033487	08033486	08036318	08036319	08036316
Female	-	-	08036317	08036314	08036315

### Splice Kit

Use to repair the duct rod if it breaks. Kit includes: Splice Tube, Epoxy and installation instructions.

Rod Dia., in (mm)	3/16 (5)	1/4 (6)	5/16 (8)	7/16 (11)	9/16 (13)
Splice Kit	08033457	08033465	08035753	08035751	08035752
Splice Tube Only	08033455	08033463	08035703	08035701	08035702



Splice Kit

Splice Tube


### Epoxy

Use with End Fittings or Splice Tubes to repair Duct Rodders.

Part Number	Description
08035851	Single pack for replacing end fittings
08035852	Double pack for splice tubes

### Tapered Head

Attaches to the end fitting on the duct rod. Guides duct rod through the conduit and allows a pull line (diameter A) to be attached to the duct rod. Comes standard with each of the duct rodders.

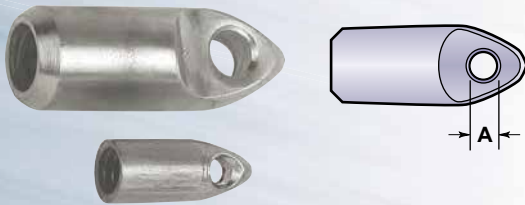

Rod Dia., in (mm)	3/16 (5)	1/4 (6)	5/16 (8)	7/16 (11)	9/16 (13)
<b>USC Thread</b>	<b>#12-24</b>	<b>5/16-18</b>	<b>3/8-16</b>	<b>3/8-16</b>	<b>3/4-10</b>
Tapered Head	08033421	08033441	08038400	08038400	08038300
Diameter A	.156 (4)	.156 (4)	.281 (7)	.281 (7)	.343 (9)
<b>Metric Thread</b>	<b>M5</b>	<b>M8</b>	<b>M12</b>	<b>M12</b>	<b>M12</b>
Tapered Head	08033410	08033480	08038301	08038301	08038301
Diameter A	.156 (4)	.156 (4)	.281 (7)	.281 (7)	.281 (7)

### O-Rings

Used to help keep accessories on the end fitting while rodding. Comes standard with the Mini-Cobra rodders.

Rod Dia., in (mm)	3/16 (5)	1/4 (6)	5/16 (8)	7/16 (11)	9/16 (13)
<b>USC Thread</b>	<b>#12-24</b>	<b>5/16-18</b>	<b>3/8-16</b>	<b>3/8-16</b>	<b>3/4-10</b>
O-Rings	02163600	02215000	-	-	-
<b>Metric Thread</b>	<b>M5</b>	<b>M8</b>	<b>M12</b>	<b>M12</b>	<b>M12</b>
O-Rings	02163600	02215000	-	-	-

