




Mechanical Sensing Unit

Electronic Control Box with Chart Recorder

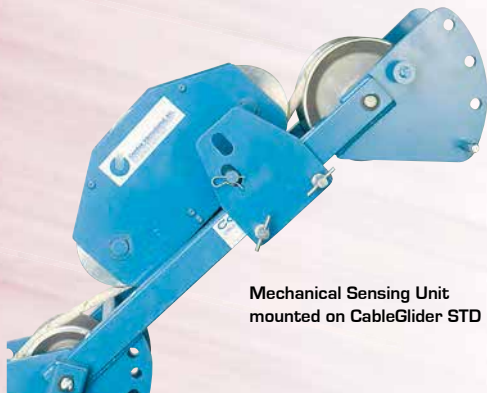

Mechanical Sensing Unit mounted on CableGlider STD



Running Line Tensiometer

The Condux Running Line Tensiometer, used with the Condux CableGlider® Cable Pullers will give accurate measurements of the force exerted on a cable as it is installed. It consists of two components: Mechanical Sensing Unit (which mounts directly to the cable puller) and the Electronic Control Box.

The unit will accommodate pull tape and rope up to and including 7/8" diameter with an accuracy of $\pm 5\%$ of full scale. Load handling capabilities and other specifications are determined by the model used.

Mechanical Sensing Unit

Mounts easily to the cable puller frame with a mounting bracket and pin. The Condux Running Line Tensiometer's Mechanical Sensing Unit permits rope installation without disassembly of the unit.

Electronic Control Box

Features large LED Display and Paperless Recorder with trend display. Paperless Recorder includes: Trend Display, CompactFlash™ card slot with 64MB Flash Card, and USB interface. A programmable overload set point has both an audible and visual indication of an overload condition. The Electronic Control Box also has the capability to disengage the cable puller if an overload occurs.

Running Line Tensiometer, CableGlider STD

Measures loads of 0 to 6,500 lbs. (0 to 28,912 N) with an accuracy of ± 325 lbs. (1,446 N).

Units comes standard with the following:

- Mechanical Sensing Unit
- ECB with these standard features:
 - o Large LED readout
 - o Paperless recorder with Trend Display, Compact Flash Drive™ with 64MB Flash Card
 - o USB Interface
- Load Cell and Cord
- Mounting Hardware
- Card Reader and Software

NOTE: For recalibrating, please call 1-800-533-2077, for RMA.

Part Number	Description
08677350	110 Volt RLT for CableGlider STD w/ data recorder

Running Line Tensiometer, CableGlider® Plus

Measures loads of 0 to 6,500 lbs. (0 to 28,912 N) with an accuracy of ±325 lbs. (1,446 N).

Units comes standard with the following:

- Mechanical Sensing Unit
- ECB with these standard features:
 - o Large LED readout
 - o Paperless recorder with Trend Display, Compact Flash Drive™ with 64MB Flash Card
 - o USB Interface
- Load Cell and Cord
- Mounting Hardware
- Card Reader and Software

NOTE: For recalibrating, please call 1-800-533-2077, for RMA.

Part Number	Description
08677355	110 Volt RLT for CableGlider Plus w/ data recorder

Running Line Tensiometer, CableGlider HD


Measures loads of 0 to 12,000 lbs. (0 to 53,376 N) with an accuracy of ±600 lbs. (2,669 N).

Units comes standard with the following:

- Mechanical Sensing Unit
- ECB with these standard features:
 - o Large LED readout
 - o Paperless recorder with Trend Display, Compact Flash Drive™ with 64MB Flash Card
 - o USB Interface
- Load Cell and Cord
- Mounting Hardware
- Card Reader and Software

NOTE: For recalibrating, please call 1-800-533-2077, for RMA.

Part Number	Description
08677360	110 Volt RLT for CableGlider HD w/ data recorder

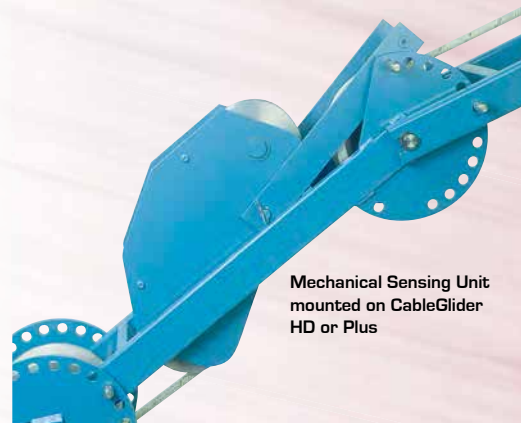

POWER CABLE INSTALLATION

Replacement Parts

Part Number	Description
08677371	ECB Unit STD 110V
08677370	ECB Unit HD 110V
08677373	Mechanical Sensing Unit for STD
08677374	Mechanical Sensing Unit for HD
08677378	RLT Manual
02289664	Fuse, 250 V 20 AMP
02289665	ON/Off Switch
08677375	Cord Load Cell
02289666	Light, Red Pilot Indicator
02289667	Alarm, Buzzer ECB
02289668	Button, Alarm Reset ECB
08677372	Chart Recorder



Running Line Tensiometer Electronic Control Box



Paperless Chart Recorder with Flash Drive and USB Interface