

Multiple Pulling Harness




Allows staggered attachment to cable or innerduct when pulling through conduit systems or during directional drilling pull-back operations. **Other harness combinations available upon request. Contact factory for details.**

FYI
Other multiple pulling harness combinations available upon request. Contact factory for details.

Part Number	Description	Working Load Per Leg		Working Load Combined		Max. Width A		Separation Between Legs B		Lead Ring Dia. C	
		(lbs)	(N)	(lbs)	(N)	(in)	(mm)	(in)	(mm)	(in)	(mm)
08549200	3 Way 1/8" (3 mm) Cable	550	2,446	1,600	7,117	2.25	57	14	356	.37	10
08549230	3 Way 1/4" (6 mm) Cable	2,300	10,230	2,900	12,899	2.00	51	14	356	.37	13
08549325	4 Way 1/4" (6 mm) Cable	2,300	10,230	4,200	18,682	2.00	51	14	356	.37	10
08569910	5 Way 1/4" (6 mm) Cable	2,300	10,230	4,200	18,682	2.00	51	14	356	.37	10
08549326	6 Way 1/4" (6 mm) Cable	2,300	10,230	4,200	18,682	2.00	51	14	356	.37	10
08549333	3 Way 3/8" (10 mm) Cable	4,800	21,351	9,000	40,032	2.63	67	10	254	.62	16
08549329	4 Way 3/8" (10 mm) Cable	4,800	21,351	9,000	40,032	2.63	67	10	254	.62	16
08549330	10 Way 3/8" (10 mm) Cable	4,800	21,351	6,000	26,689	4.50	114	6	152	.75	19
08549334	12 Way 3/8" (10 mm) Cable	4,800	21,351	6,000	26,689	4.50	114	6	152	.75	19
08549342	16 Way 3/8" (10 mm) Cable	4,800	21,351	6,000	26,689	4.50	114	6	152	1.00	25
08549331	2 Way 1/2" (13 mm) Cable	7,000	31,136	10,000	44,480	2.50	64	12	305	.50	13
08549332	3 Way 1/2" (13 mm) Cable	7,000	31,136	15,000	66,720	3.75	95	12	305	.87	22
08549340	4 Way 1/2" (13 mm) Cable	7,000	31,136	15,000	66,720	3.75	95	12	305	.87	22

NOTE: 10 & 12 Way 3/8" (10 mm) harnesses only have a single stagger. All other harnesses are sequentially staggered.

SWIVELS & ACCESSORIES

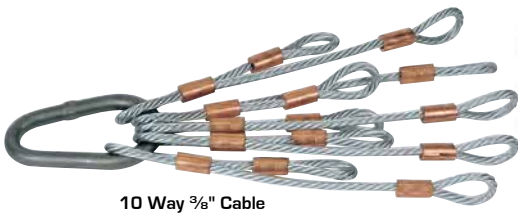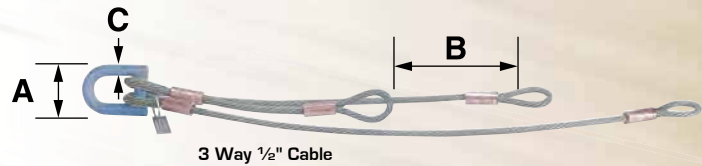

FYI
See swivel compatibility chart on page 49 to match up your multiple pulling harness with your swivels.



Eye to Eye Connectors

Light duty winch line pulling connector drop forged from C-1035 steel. Hot dip galvanized.

Part Number	Size		Working Load	
	(in)	(mm)	(lbs)	(N)
08050300	3/8	10	2,200	9,786
08050500	1/2	13	3,600	16,013
08050501	3/4	16	5,200	23,130



NOTE: To be used for cable stringing or pulling only.