

## Hooked Hanger Sheaves

Tie off in the manhole to guide cable into the duct. Also used with alignment arm for cable removal. Hinged yoke for easy cable installation and removal. 10,000 lbs. (44,480 N) cable tension load capacity. See replacement sheave chart for specifications on sheave sizes. Alignment arm sold separately. Replacement Sheaves available. See Specifications and Selection Charts on page 113.

Part Number	Sheave Size	
	(in)	(mm)
08041400	3 x 11	76 x 279
08042400	4 x 11	102 x 279
08042420	4 x 20	102 x 508
08042500	5 x 11	127 x 279
08042520	5 x 20	127 x 508
08042526	5 x 26½	127 x 673
08042527	5 x 26½	127 x 673 w/Light Duty Hanger Arm
08082600	6 x 11	152 x 279
08082800	8 x 11	203 x 279
08045901	Alignment arm for 3, 4, & 5" (76, 102, & 127 mm) sheaves	


## 4,000 lb. Hooked Hanger Sheaves

Tie off in manhole to guide cable into and out of duct. 4,000 lbs cable tension load capacity. For less demanding cable pulling applications than Condux 10,000 lbs sheaves. Replacement Sheaves available. See Specifications and Selection Charts on page 113.

- Steel welded frame
- Nylon cable protectors
- Lightweight
- Cast aluminum sheaves
- Forged hook with 1.12" opening

Part Number	Sheave Size		
	(in)	(mm)	
08042611	5 x 11	127 x 279	Aluminum
08042610	5 x 11	127 x 279	Nylatron
08042620	5 x 20	127 x 508	Aluminum
08042626	5 x 26½	127 x 673	Aluminum
08042650	8 x 26	203 x 660	Aluminum

08042670 Second arm for 8"x26" sheave 1,000 lb rating for hanging only  
 08042680 Replacement arm for 8"x26" sheave

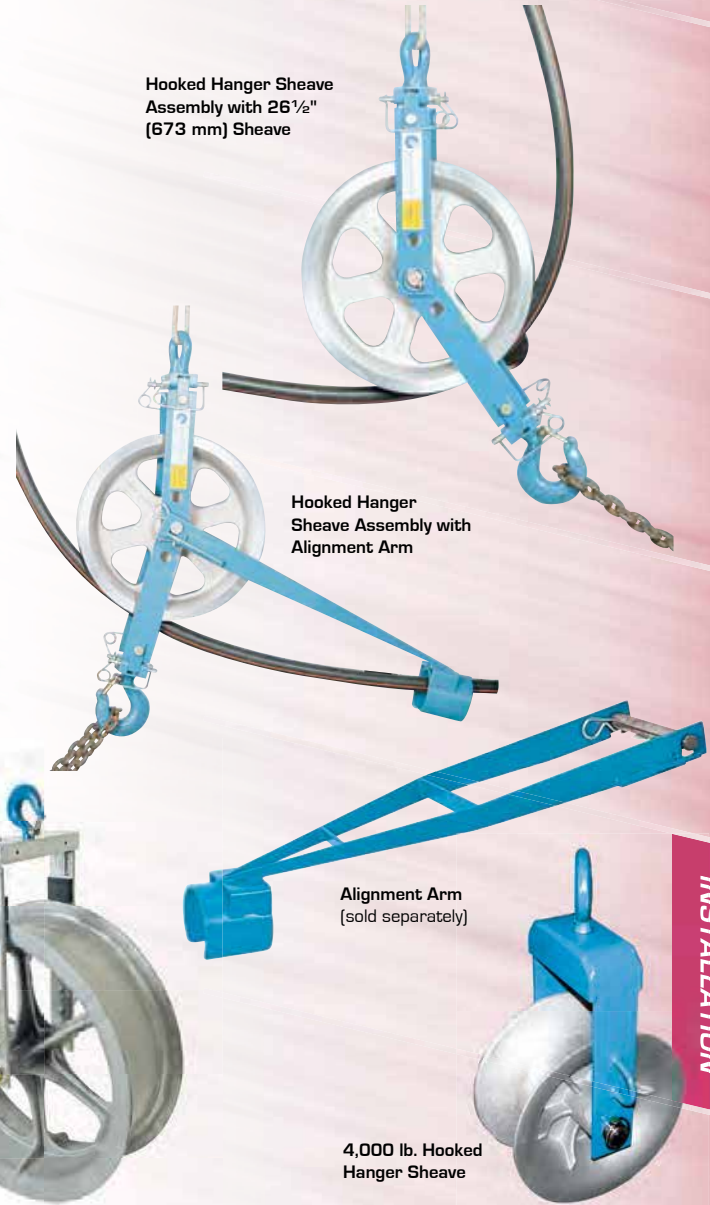

**POWER CABLE INSTALLATION**

