


Threaded Chain Connectors

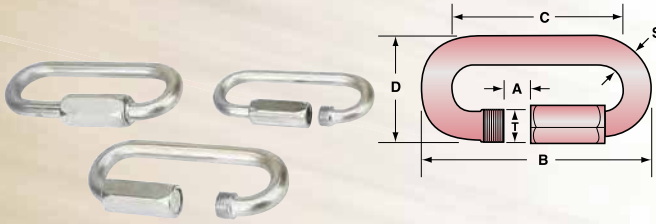

Offer a quick and easy way to connect pulling eyes or swivels to winch lines, harnesses or rope. To close, simply screw the nut onto the threaded end. Connectors are reusable.

Note: To be used for cable stringing or pulling only.


Part Number	Work Load Limit		Stock Diameter S		Threaded Shaft T		A		B		C		D	
	(lbs)	(N)	(in)	(mm)	(in)	(mm)	(in)	(mm)	(in)	(mm)	(in)	(mm)	(in)	(mm)
08581212	200	890	0.125	3.2	0.20	5	0.375	9.5	1.813	46.0	1.563	40	0.79	20
08581218	550	2,446	0.188	4.8	0.27	7	0.500	12.7	2.438	61.9	2.063	52	1.06	27
08581225	770	3,425	0.250	6.4	0.35	9	0.563	14.3	2.750	69.9	2.313	59	1.17	30
08581231	1,430	6,361	0.313	7.9	0.43	11	0.688	17.5	3.438	87.3	2.813	71	1.57	40
08581237	1,760	7,828	0.375	9.5	0.47	12	0.750	19.1	3.750	95.3	3.000	76	1.68	43
08581250	2,755	12,254	0.500	12.7	0.60	15	0.938	23.8	4.875	123.8	3.938	100	2.16	55
08581256	4,410	19,616	0.563	14.3	0.67	17	1.063	27.0	5.563	141.3	4.500	114	2.39	61
08581262	5,510	24,508	0.625	15.9	0.74	19	1.125	28.6	6.313	160.3	5.063	129	2.73	69
08581268	6,615	29,424	0.688	17.5	0.86	22	1.250	31.8	6.938	176.2	5.500	140	3.04	77
08581278	7,935	35,295	0.781	19.8	0.93	24	1.375	34.9	7.813	198.4	6.250	159	3.33	85

Threaded Chain Connector Compatibility Chart

Chain Connector Part Number	Size in (mm)	Pulling Eye Size Range		Eye to Eye Connectors Size	Pulling Harnesses	
		Standard Head Reusable Power Pulling Eyes Cable Size	Fixed Head Innerduct Pulling Eyes Duct I.D. in (mm)		Separate Leg Ends	Large Front Link
08581212	1/8 (3)	1/0-4/0 AWG		---	---	1/8, 1/4
08581218	3/16 (5)	1/0-4/0 AWG, 700, 750 kcmil		All	3/8	1/8, 1/4, 3/8
08581225	1/4 (6)	1/0-4/0 AWG, 350, 700, 750 kcmil		All	3/8, 1/2	1/8, 1/4, 3/8
08581231	5/16 (8)	All		All	All Cable	1/8, 3 x 1/4, 2 x 1/2, Chain
08581237	3/8 (10)	All		All	All Cable	1/8, 1/4, 3 & 4 x 3/8, 2 x 1/2, Chain
08581250	1/2 (13)	250-2,500 kcmil		---	All	All
08581256	9/16 (14)	350, 500, 1,000-2,500 kcmil		---	All	All
08581262	5/8 (16)	350, 500, 1,000-2,500 kcmil		---	All	All
08581268	11/16 (17)	1,000-2,500 kcmil		---	All	All
08581278	7/8 (22)	1,000-2,500 kcmil		---	All	All

Figure 8 Swing Link

For quick connections to winch line or pulling harnesses.



Note: To be used for cable stringing or pulling only.

Part Number	Size		Working Load		A Length		B Width		C Eye ID		D Eye ID	
	(in)	(mm)	(lbs)	(N)	(in)	(mm)	(in)	(mm)	(in)	(mm)	(in)	(mm)
08580825	1/4	6	540	2,402	1.94	49	.94	24	.38	10	.50	13
08580837	3/8	10	900	4,003	2.90	74	1.31	33	.50	13	.63	16
08580850	1/2	13	1,620	7,206	3.25	83	1.63	41	.69	18	.75	19
08580875	3/4	19	3,600	16,013	5.00	127	2.50	64	.94	24	1.13	29
08580899	1	25	8,100	36,029	6.50	165	3.25	83	1.25	32	1.50	38

Swing Link Compatibility Chart

Swing Link Part Number	Size in (mm)	Pulling Eye Size Range Standard Head Reusable Power Pulling Eyes Cable Size	Fixed Head Innerduct Pulling Eyes Duct I.D. in (mm)	Eye to Eye Connectors Size	Pulling Harnesses	
					Separate Leg Ends	Large Front Link
08580825	1/4 (6)	---	---	---	1/8, 1/4	---
08580837	3/8 (10)	500, 700, 750 kcmil	---	3/8	1/8, 1/4, 3/8, Chain	---
08580850	1/2 (13)	350, 500, 1,000-2,500 kcmil	---	3/8, 1/2	All Cable	2 x 1/2
08580875	3/4 (19)	1,000-2,500 kcmil	---	All	All Cable	1/8, 1/4, 3/8, 2 x 1/2, Chain
08580899	1 (25)	---	---	1/2, 5/8	All Cable	All